

MEET THE
BINGHAM FLEXO

SALES TEAM



John Bingham

President

630-235-4835

john.bingham@binghamflexoservices.com



Shane Weber

VP of Sales & Marketing

630-235-4836

shane.weber@binghamflexoservices.com



Dan Dietrich

Technical Sales

630-750-6652

dan.dietrich@binghamflexoservices.com



Mike Poppen

Technical Sales

630-235-4833

mike.poppen@binghamflexoservices.com



Ben Hebel

Technical Sales

920-569-9353


ben.hebel@binghamflexoservices.com

STRAPPING SYSTEMS

Based in Batavia, Illinois, Bingham Flexo Services offers service to the Midwest region of the United States. Our sales territory includes Illinois, Indiana, Iowa, Kansas, Kentucky, Michigan, Minnesota, Missouri, Nebraska, Ohio, North Dakota, South Dakota, Western Pennsylvania and Wisconsin.




TP-702C and TP-702CQ3-S
STRAPPING & SQUARING SYSTEM

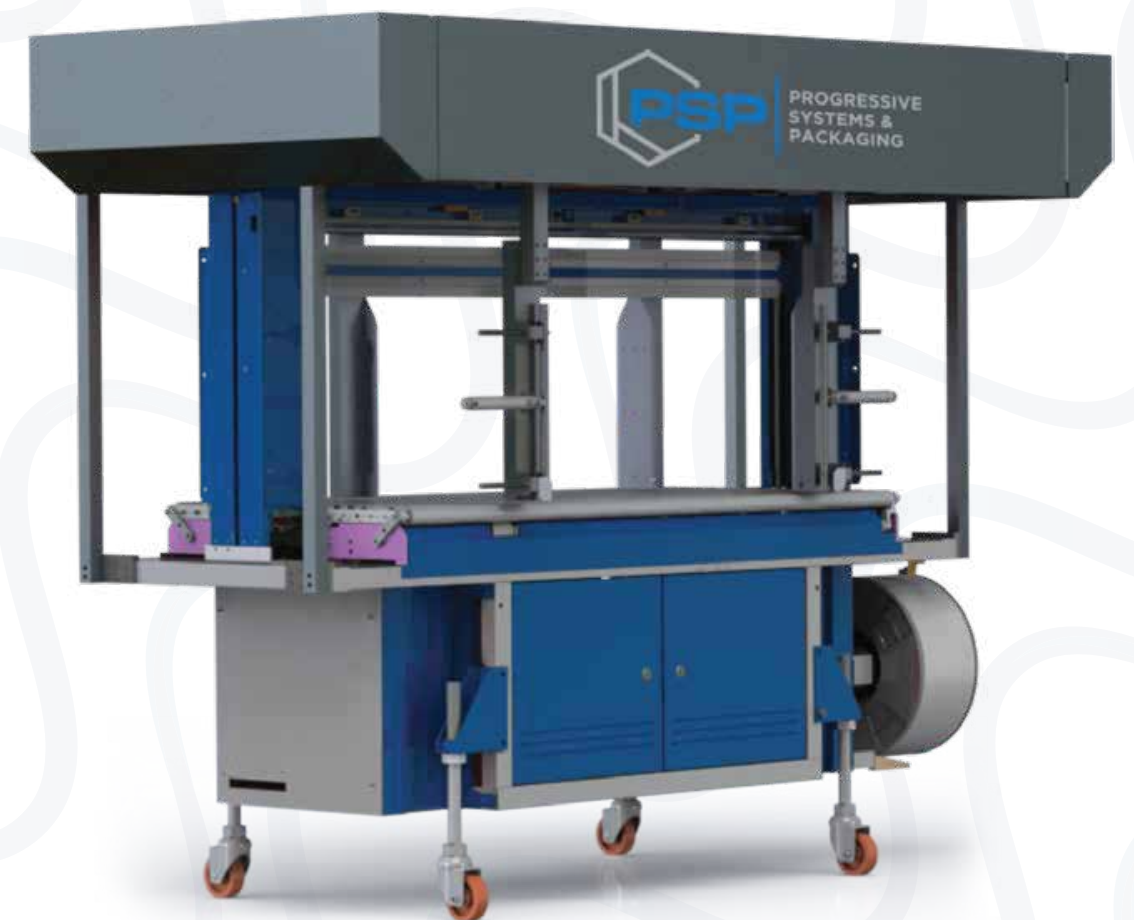

BINGHAM FLEXO SERVICES, INC.

245 W. Roosevelt Rd. BLDG. 9 Unit 62, West Chicago, IL 60185

630-879-7301 | info@binghamflexoservices.com | www.binghamflexoservices.com

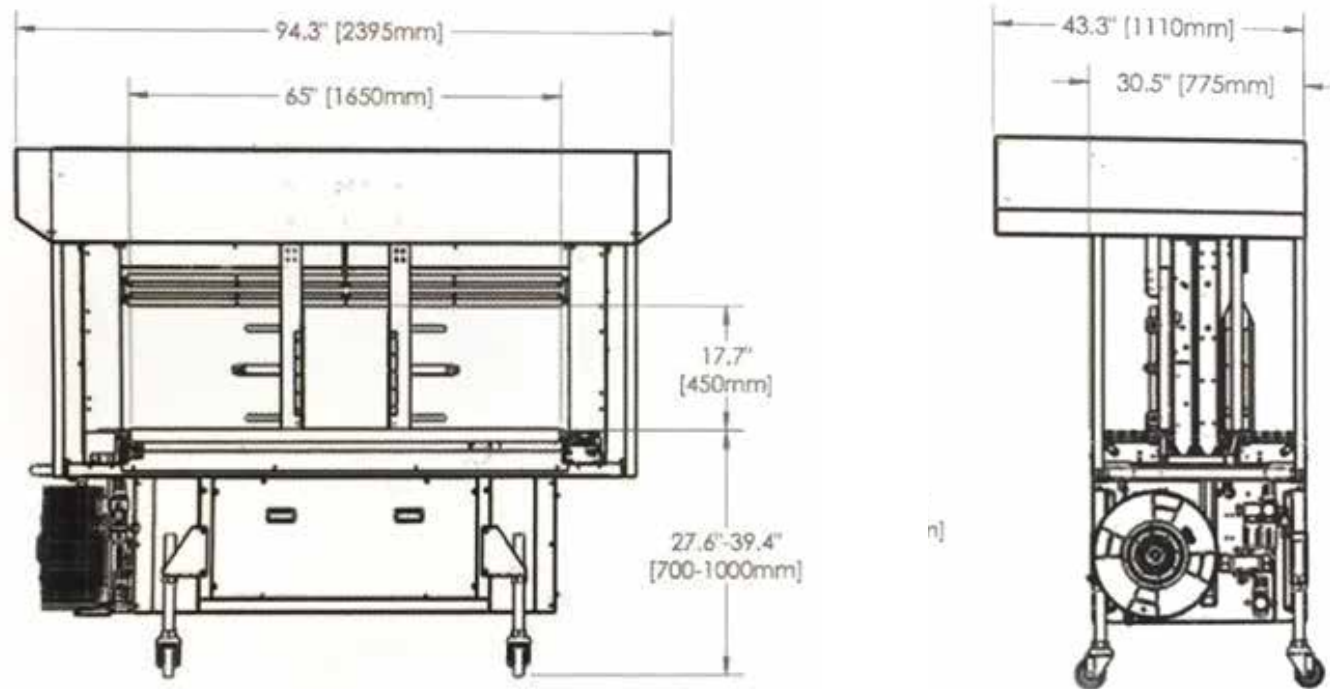

The TP-702C and TP-702CQ3-S are a high speed automatic strapping systems designed for the latest high speed flexo folder gluers. The TP-702C and TP-702CQ3-S can come in a tandem system for speed and redundancy requirements, and comes complete with integration capabilities and auto setup.

- 26 bundles per minute capability
- Minimum bundle size - 200 mm (W) x 200 mm (H) x 300 mm (L)
- 3-side squaring bundle control
- Strap Width - 5 mm, 6 mm, 9 mm PP Strap (Currently reading 5-6mm)
- Auto strap ejector
- Bundle weight 40 kg
- Reliable long-lasting heat sealer
- Serve driven auto setup
- Designed for the latest high speed Flexo folder gluers
- 200-600 volt 3 phase
- DC brushless motor technology
- Power roller table top with VFD 270 degree table top
- Auto strap feed
- Siemens PLC with HMI touchscreen auto setup
- 3 color light tower (red, yellow, green)
- Tool less access to strapping head
- Long lasting UHMW track
- Tandem system configuration
- Patented jammed-strap ejection device
- High speed fully automatic strapping system

Arch Size	PSP702C-3SS 1650 mm(W) x 450 mm(H)
Strap Width	5 mm, 6 mm, or 9 mm PP strap
Tension Range	1 - 32 kg
Capacity	Up to 26 bundles/minute (single strap) 20 bundles/minute (double straps)
Min. Bundle Size	200 mm(W) x 20 mm(H) x 300 mm(L)
Bundle Weight	max 40 kg
Transport Speed	15 – 60 M/minute
Electrical Requirements	200 - 600 volt 3 phase



- Featuring Teufelberger strapping products
- Polypropylene bundler strapping
- Polyester unitizer (bander) strapping
- Strapping for Signode, Mosca, Samuels, etc.
- Warehoused in Carol Stream, IL for fast service



Robust & Compact Mechanical Strapping Head



Siemens PLC Control



Free Access To Strapping Guide

CONTACT BINGHAM FLEXO SERVICES TODAY FOR MORE INFORMATION

630-879-7301 | info@binghamflexoservices.com | www.binghamflexoservices.com